


Temperature Probes

Use with multimeters with Type K and Type J functions

Bead Wire Type K and J Temperature Probes

- **TP870 & 872501** Bead wire; 39" (1m) cable; subminiature Type K connector; Range: TP870 (-40 to 482°F/-40 to 250°C); Range 872501 (-4 to 482°F/-20 to 250°C) - **\$13**
- **872502** Bead Wire; 39" (1m) cable; subminiature Type J connector; Range (-328 to 392°F/-200 to 200°C) - **\$13**
- **TP872** Bead wire; 39" (1m) cable; banana connector; Range (-4 to 482°F/-20 to 250°C) - **\$13**
- **TP873** Bead wire; 36" (.91m) cable; subminiature Type K with banana connector; Range (-58 to 482°F/-50 to 250°C) - **\$13**
- **TP875** High temperature bead wire probe; 39" (1m) cable; subminiature Type K with banana connector; Range (-58 to 1000°F/-50 to 538°C) - **\$29**
- **TP879** Adaptor, type K; subminiature to banana - **\$4**

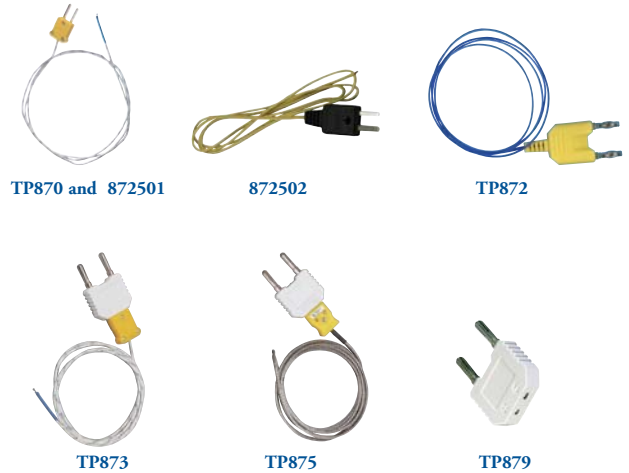

Type K and J Temperature Probes

Penetration

- **TP880** 3.4" (87mm) Penetration Probe; 26.5" (673mm) cable; probe diameter .13" (3.3mm); Type K, Range (-40 to 500°F/-40 to 260°C) - **\$29**
- **TP882** 8" (203mm) High Temperature Penetration Probe; 72" (183cm) cable; probe diameter 0.13" (3.3mm); Type K, Range (-50 to 1000°F/-46 to 538°C) - **\$29**

General Purpose


- **TP874** 3" stainless steel probe; 28" (.71m) cable; Type K; Range (32 to 392°F/0 to 200°C) - **\$13**
- **871515** 4" (100mm) General Purpose Probe; 39" (1m) cable; probe diameter .13" (3.3mm); Type K, Range (-32 to 1292°F/-200 to 700°C) - **\$35**
- **881605** 8" (203mm) General Purpose Probe; 39" (1m) cable; probe diameter .13" (3.3mm); Type K, Range (-328 to 1292°F/-200 to 700°C) - **\$40**
- **801515** 4" (150mm) General Purpose Probe; 39" (1m) cable; diameter .13" (3.3mm); Type J, Range (-328 to 842°F/-200 to 450°C) - **\$35**

Immersion

- **881603** 6" (150mm) Immersion Probe; 39" (1m) cable; diameter 0.13" (3.3mm); Type K, Range (-58 to 1292°F/-50 to 700°C) - **\$40**
- **881604** 6" (150mm) Needle Thin Probe; 39" (1m) cable; diameter 0.06" (1.52mm); Type K, Range (-58 to 1112°F/-50 to 600°C) - **\$40**

Surface

- **881602** 6" (150mm) Surface Probe; 39" (1m) cable; diameter 0.32" (8.13mm); Type K, Range (-58 to 1472°F/-50 to 800°C) - **\$55**
- **TP884** 6.5" (165mm) Surface Probe; 5' (1.52m) cable; probe diameter 0.63" (16mm); Type K, Range (32 to 500°F/ 0 to 260°C) - **\$29**



871515, 881605, and 801515 general purpose probes



881602 surface probe



881603 and 881604 immersion probes

Available at:

www.Electrical-Contractor.net
www.Contractors-Books.com

Make mine an Extech!™

